

NOTES:

1.0 MATERIALS:

- 1.1 HOUSING & NUT: STAINLESS STEEL PER ASTM-A582, TYPE 303.
- 1.2 CENTER CONTACT: BERYLLIUM COPPER ROD ALLOY C172, PER ASTM-B196.
- 1.3 DIELECTRIC: PTFE FLUOROCARBON PER ASTM-D1457.

2.0 PLATING:

- 2.1 HOUSING & NUT: GOLD PER MIL-G-45204 TYPE II, CLASS 1.
- 2.2 CENTER CONTACT: GOLD PER MIL-G-45204, TYPE II, CLASS 2.

3.0 MECHANICAL:

- 3.1 SMA JACK INTERFACE DIMENSIONS PER MIL-STD-348, FIG. 310-2


- 3.2 CENTER CONTACT CAPTURED IN ACCORDANCE WITH MIL-A-55339

4.0 DIMENSIONS IN PARENTHESIS ARE IN MILLIMETERS

5.0 VSWR (MAX):

DC to 12.4 GHz: $1.06 + .009f(\text{GHz})$
 12.4 to 25.0 GHz: $1.05 + .01f(\text{GHz})$

ALL OTHER MECHANICAL, ELECTRICAL AND ENVIRONMENTAL CHARACTERISTICS ARE IN ACCORDANCE WITH MIL-A-55339

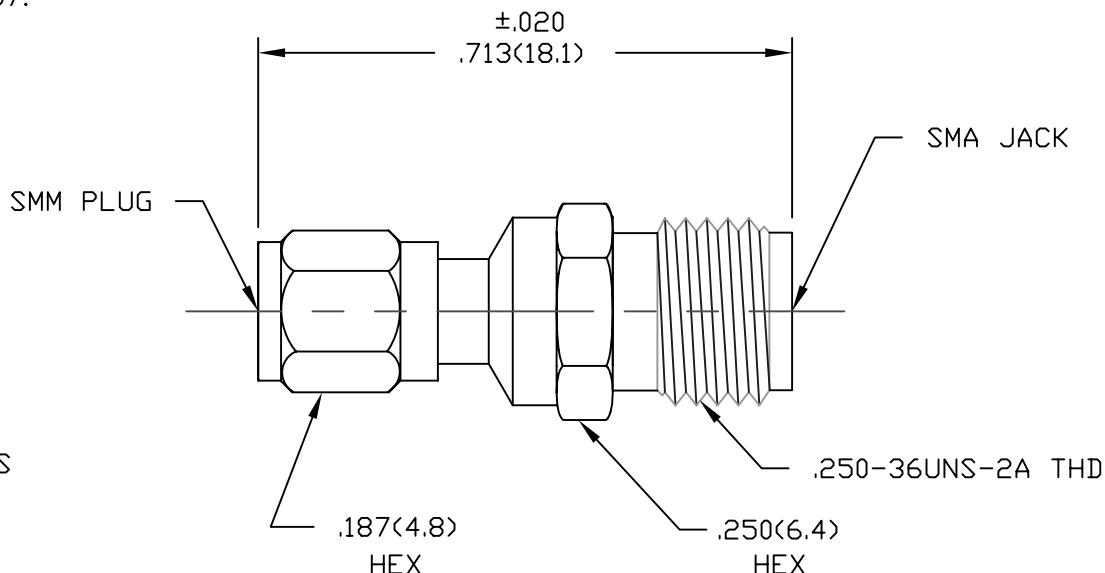

REV.	DESCRIPTION	DATE
		3/24/95
-1	ADDED TITLEBLOCK	3/17/95

NOTICE: The information contained in this drawing is proprietary and must not be used without the permission of Emerson Network Power.

UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE:

3 PLACE DECIMALS ±.005

2 PLACE DECIMALS ±.02

FRACTIONS ±1/64

PARALLELITY: T.I.R. _____

FLATNESS: T.I.R. _____

CONCENTRICITY: T.I.R. _____

ANGLES AND PERPENDICULARITY: ±1°

CAGE CODE

34078

MIDWEST MICROWAVE



EMERSON.
Network Power
Connectivity Solutions

DRAWN/DATE

A.BEATTY
3/22/95

ENG./DATE

A.OSGA
3/24/95

APPROVED/DATE

P.GOODMAN
3/23/95

DRAWING NUMBER

ADT-2847-SF-MMM-02-01

REV.

-1

SCALE: 5=1

SHEET 1 of 1