



REV	ECO	
A3	-	

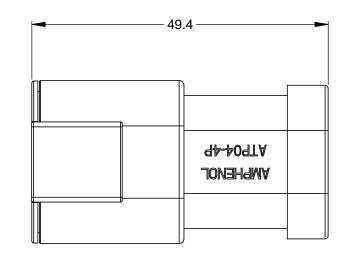

REQUIRES CONTACT RETENTION WEDGE AWP-4P



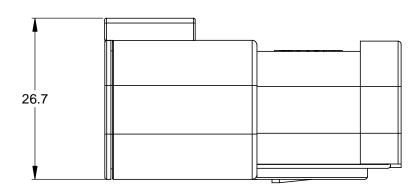




NOTES: UNLESS OTHERWISE SPECIFIED

- 1. MATERIAL: HOUSING: THERMOPLASTIC SEAL: SILICONE RUBBER
- 2. MODIFICATIONS: END CAP
- 3. SPECIFICATIONS:
  - 3.1 CURRENT RATING: 25 AMPS
  - 3.2 OPERATING TEMPERATURE: -55°C TO +125°C
    3.3 DIELECTRIC WITHSTANDING VOLTAGE: LESS THAN 2 MILLIAMPS CURRENT LEAKAGE @ 1500 VOLTS AC.
    3.4 INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 25°C.
    3.5 MOISTURE RESISTANCE: IP67 (MATED CONDITION)
    3.6 MATING CYCLE DURABILITY: 100 CYCLES
  - 3.7 RoHS COMPLIANT
- 4. MATING PART: ATP06-4S\* PLUG. (\* = MODIFICATIONS AND COLORS)

5. ALL DIMENSIONS ARE FOR REFERENCE USE ONLY.

## 6 CONTACT SIZE AND REAR SEAL WIRE RANGE:

CONTACT	MIN. INSUL	MAX. INSUL	TYPICAL
SIZE	O.D.	O.D.	WIRE RANGE
12	3.40 mm (.134 in)	4.95 mm (.195 in)	

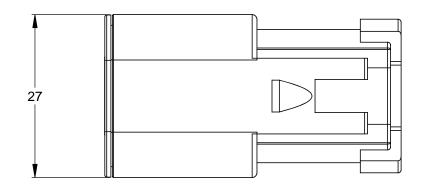

PART N	PART NUMBER CHART		
COLOR	PART NUMBER		
GREY	ATP04-4P-EC01		
BLACK	ATP04-4P-EC01BK		

STANDARD MOLDED COLOR IS GREY. ADDITIONAL COLOR ( BLACK ) IS AVAILABLE VIA SPECIAL ORDER.

	SEE PART NUMBER CHA		
	PART NUMBER		
QUANTITY		M	
UNLESS OTHER	WISE SPECIFIED	SIGNAT	
<ol> <li>All dimensions are in metric(mm).</li> <li>Tolerances are as follows:         <ol> <li>PL DEC ±0.30</li> <li>Fractions ±1/64</li> </ol> </li> </ol>		DRAWN: J	
	Fractions ±1/64 Angles ±1°	CHECKED:	
3) Note reference = $X$		ENGINEER:	
MATERIAL SPECIFICA	TIONS:	APPROVAL:	
		CUSTOMER:	
		THIS DRAWING IS	
PROCESS SPECIFICATIONS: NEXT ASS'Y:		SPECIFICATION ON SHOWN HEREON A THE AMPHENOL C OF REPRODUCTIO DIMENSIONS ARE MANUFACTURING	

